



CBY SERİSİ 3 GEÇİŞLİ YOĞUŞMALI KALORİFER KAZANLARI

GAS FIRED 3-PASS CONDENSING BOILER



HIGH QUALITY

Long life

ÜSTÜN KALİTE

Uzun ömürlü ekonomik

100.000 - 800.000 kcal/h




GAZ YAKITLI ÜÇ GEÇİŞLİ YOĞUŞMALI KAZAN

- * Düşük yakıt tüketimi
- * Dengeli yanma ve düşük işletme maliyet
- * Etketif ısı kullanımı
- * Düşük hava kirliliği, mükemmel yanma
- * Yoğuşma ile yanmış kazdaki su buharı ısının transfer edilmesi ile %107 ye varan yanma verimi
- * Son derece düşük baca gazı ısı
- * Büyük su hacmi
- * Kolay sökülüp, takılabilen saç kafesli dış yüzey
- * Alüminyum folyo kaplı 80 mm cam yününe ilaveten taş yünü ile izolasyon ve refrakter malzeme kaplı ön kazan kapağı.

GAS FIRED 3 PASS CONDENSING BOILER

- * Low fuel consumption
- * Optimum thermal balance, low operation costs.
- * Low NOx
- * Effective heat usage.
- * Lower pollution, very good emissions
- * High water content and very high efficiency (up to 107%) are the main features of this boiler
- * Recovery of the latent heat by condensation of the water vapour present in the flue gases
- * High water volume
- * Extremely low flue temperature equal to that of the return water plus about 15 C
- * Aluminium folio covered 80 mm thickness glass wool insulation, also rockwool and ceramic insulation on the boiler door
- * Casing made of easy-to-mount painted steel panels

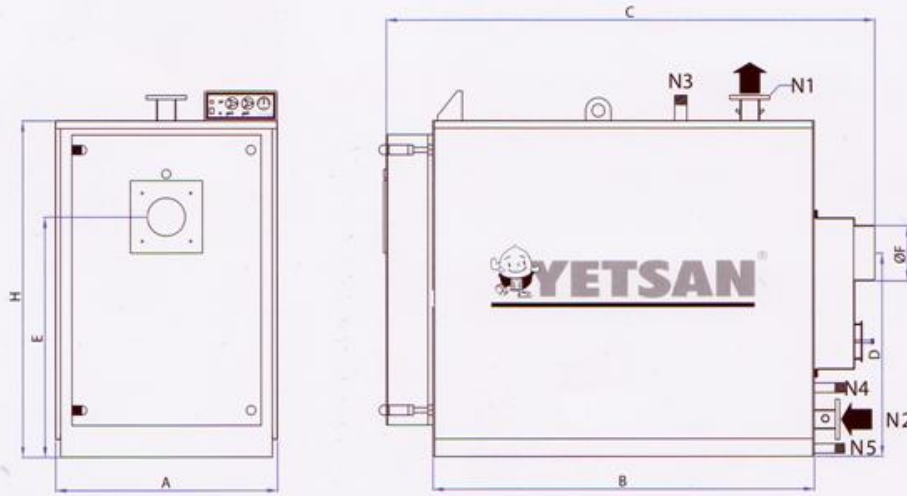

TEKNİK BİLGİLER / SPECIFICATIONS

KAZAN TİPİ BOILER TYPE	KAPASİTE / CAPACITY		KARŞI BASINÇ PRESSURE DROP mbar	ÖLÇÜLER DIMENSIONS mm							BAĞLANTILAR CONNECTIONS					SU HACMI WATER VOLUME
	Kcal/h	KW		A	B	C	D	E	ØF	H	N1	N2	N3	N4	N5	lt
CYB200	200.000	233	0,9	960	1655	2074	600	935	210	1280	PN 80	1.1/2"	1.1/4"	3/4"	520	
CYB250	250.000	291	1	960	1655	2074	600	935	210	1280	PN 80	1.1/2"	1.1/4"	3/4"	490	
CYB300	300.000	349	1	1010	1700	2175	650	1050	300	1480	PN 80	1.1/2"	1.1/4"	3/4"	800	
CYB400	400.000	465	1,2	1050	1742	2175	710	1080	350	1520	PN 80	1.1/2"	1.1/4"	3/4"	980	
CYB450	450.000	523	1,3	1050	1742	2175	710	1080	350	1520	PN 80	1.1/2"	1.1/4"	3/4"	950	
CYB500	500.000	581	1,4	1050	1980	2410	710	1080	350	1520	PN 80	2"	1.1/2"	3/4"	1200	
CYB600	600.000	698	1,5	1160	2000	2490	840	1240	350	1680	PN 100	2"	1.1/2"	3/4"	1550	
CYB700	700.000	814	1,6	1260	2000	2490	900	1350	400	1830	PN 100	2"	1.1/2"	3/4"	2250	
CYB800	800.000	930	1,7	1260	2266	2780	900	1350	400	1830	PN 100	2"	1.1/2"	3/4"	2520	

N1 : Kazandan çıkış (sıcak su)

N2 : Kazana dönüş (soğuk su)

N3 : Emniyet gidiş borusu

N4 : Emniyet dönüş borusu

N5 : Doldurma / Boşaltma

Hot water outlet

Hot water return

Safety outlet

Safety return

Filling tap

Выход воды котла (горячая вода)

Вход воды котла (холодная вода)

Выход трубы безопасности

Обратка трубы безопасности

Залив / слив

Ölçüleri değiştirme hakkımız mahfuzdur

The technical data and accessories can be changed.

Мы оставляем за собой право вносить изменения в размеры



PAZARLAMA ISI SİSTEMLERİ SAN. ve TİC. LTD. ŞTİ

Genel Merkez : Bağdat Cad. No. 456 German Apt. K4 Suadiye - İstanbul

Fabrika : Kadı Yeri Mevkii Tavşanlı Köyü - Gebze

Web Site : www.yetsanpazarlama.com.tr

e-mail : yetsan@yetsanpazarlama.com.tr

Tel : 009 0216 384 54 36 (pbx) Fax : 009 0216 384 54 40

Tel : 009 0262 724 87 80 Fax : 009 0262 724 87 79